Electrolux concept counters

Refrigerators - 3 compartments

Electrolux Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.

728294

- 150mm height-adjustable feet.
- Internal and external doors, front and side panels and worktop in 304 AISI stainless steel.
- Rounded internal corners for ease of cleaning.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.
- Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.
- Access to all components from the front.
- In compliance with H requirements.
- C.F.C. and H.C.F.C. free.
- High-density expanded polyurethane foam 50 mm in thickness with cyclopenthane injection.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

Electrolux

Electrolux concept counters
Refrigerators - 3 compartments

	HB3P 728207	HB2P2C 728235	HB1P4C 728241	HB6C 728242	HB3PNT 727106
TECHNICAL DATA					
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	420	420	415	415	415
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In
External dimensions - mm					
width	1721	1721	1721	1721	1721
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102	700, 1098
height	850	850	850	850	800
Internal dimensions - mm					
depth	580	580	580	580	580
height	543	543	543	543	543
Worktop type	Stainless Steel	Stainless Steel	Stainless Steel		none
No worktop					●
Min/Max internal humidity - %	50	50	50	50	50
N° of drawers		2x1/2	4x1/2	6x1/2	
N° and type of door	3	2	1		3
Compressor power - HP	1/4	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	4/20	4/20	4/20	4/20	4/20
Refrigerant type	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	150	150	150	150	150
Refrigeration power - W	343	343	343	343	343
Refrigerant power					
at evaporation temperature - °C	-20	-20	-20	-20	-20
Power - kW					
installed-electric	0.34	0.335	0.335	0.335	0.34
Net weight - kg.	142	150	158	168	142
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES					
1/1 GN GREY "RILSAN" GRID	3	2	1		3
ACCESSORIES					
2x½ DRAWER KIT FOR REFRIGERATED TABLES	880118	880118	880118		880118
3x1/3 DRAWER KIT FOR REFRIGERATED TABLES	880115	880115	880115	880115	880115
DRAWER KIT-1/3+2/3 (BOTTLES)-REF.TABLES	880126	880126	880126	880126	880126
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139		880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205
LOCK KIT FOR REFRIGERATED TABLES	880130	880130	880130	880130	880130
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140		880140
WORKTOP FOR 3 DOOR REFRIGERATED TABLES					880196
WORKTOP+UPSTAND FOR 3 DOOR REFRIG.TABLE					880098

HBAC060
2009-10-06

Subject to change without notice

Electrolux concept counters
Refrigerators - 3 compartments

728207, 728242, 728241, 728235

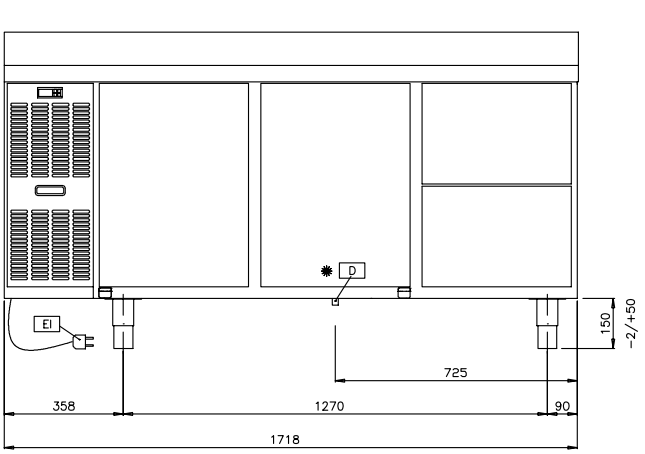

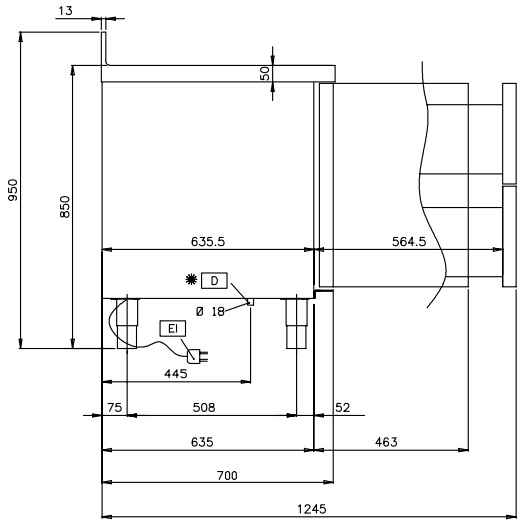

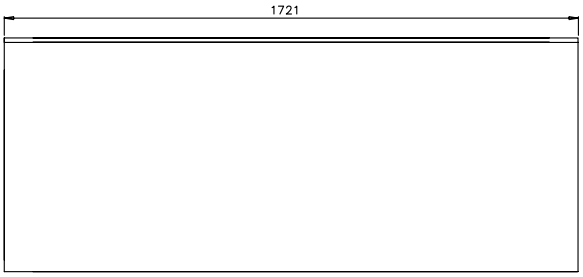



	HB3P 728207	HB2P2C 728235	HB1P4C 728241	HB6C 728242
LEGEND				
D - Water drain	16mm	16mm	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50

HBAC060

2009-10-06

Subject to change without notice

Electrolux concept counters
Refrigerators - 3 compartments

727106

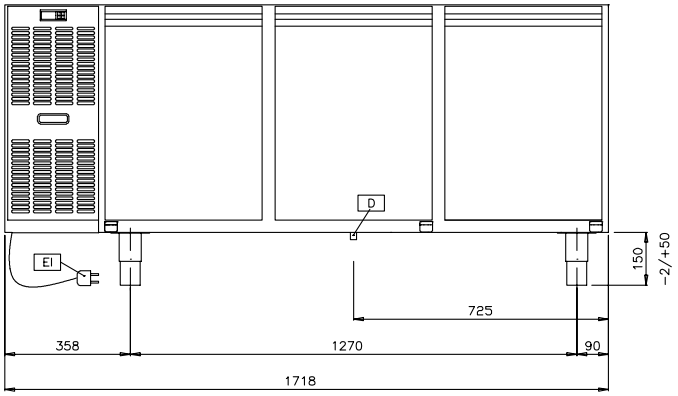

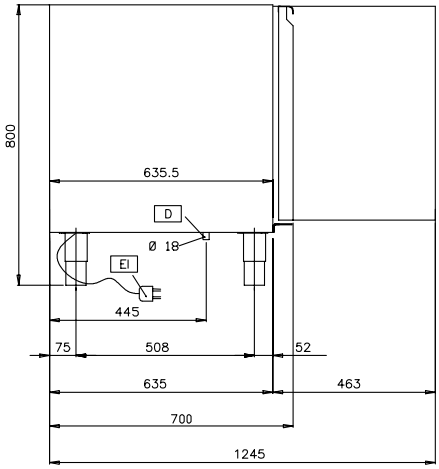

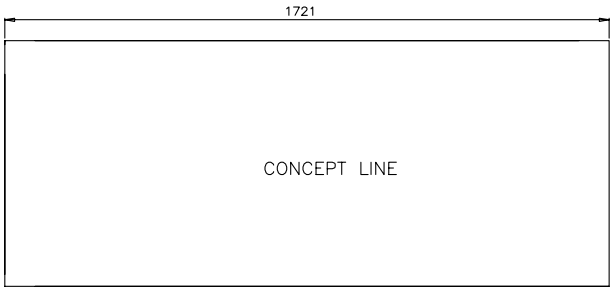



	HB3PNT 727106
LEGEND	
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50

HBAC060

2009-10-06

Subject to change without notice